



Instrukcije za montažu: Stiropor blok Nero


Stiropor blok NERO konstruktivni detalj armiranja zida - uzdužni i poprečni presek za visinu 1,20 m:

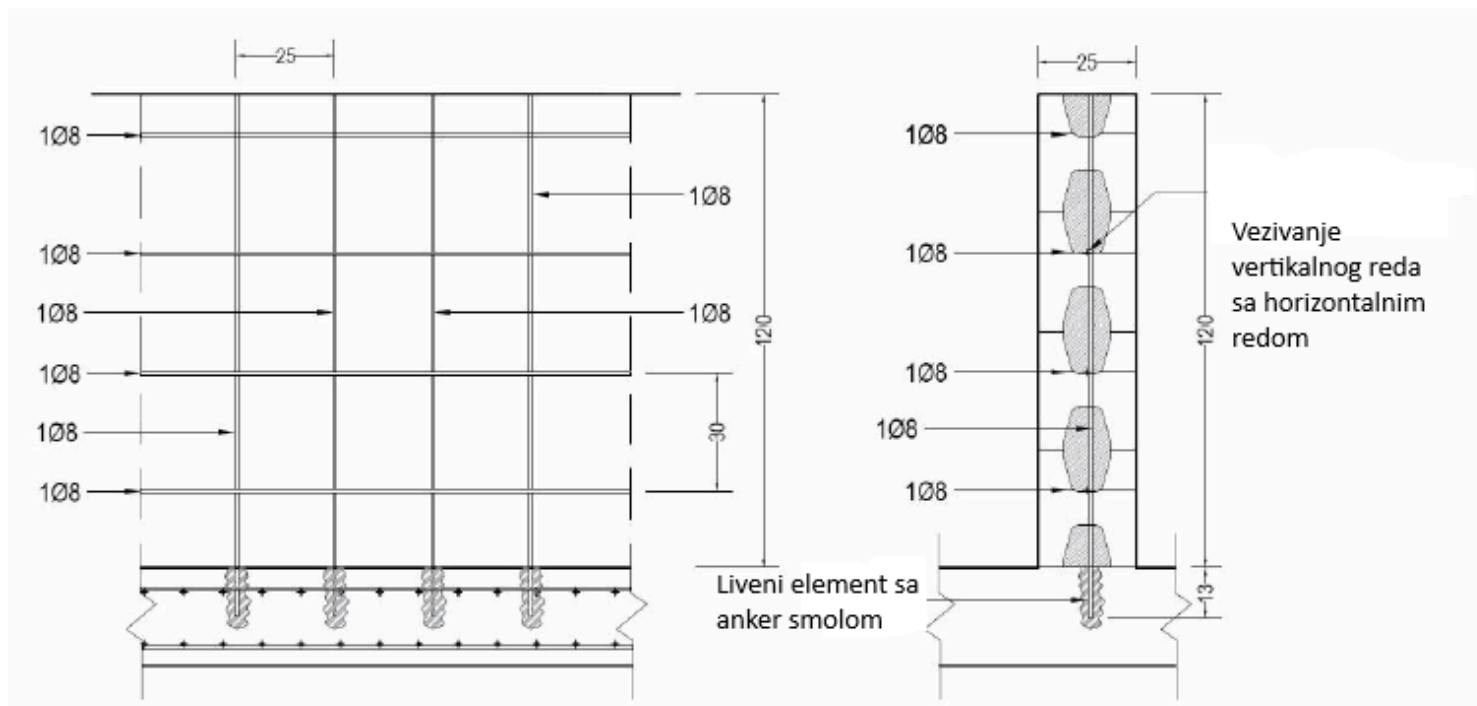


Stiropor blok NERO konstruktivni detalj armiranja zida - uzdužni i poprečni presek za visinu 1,50 m

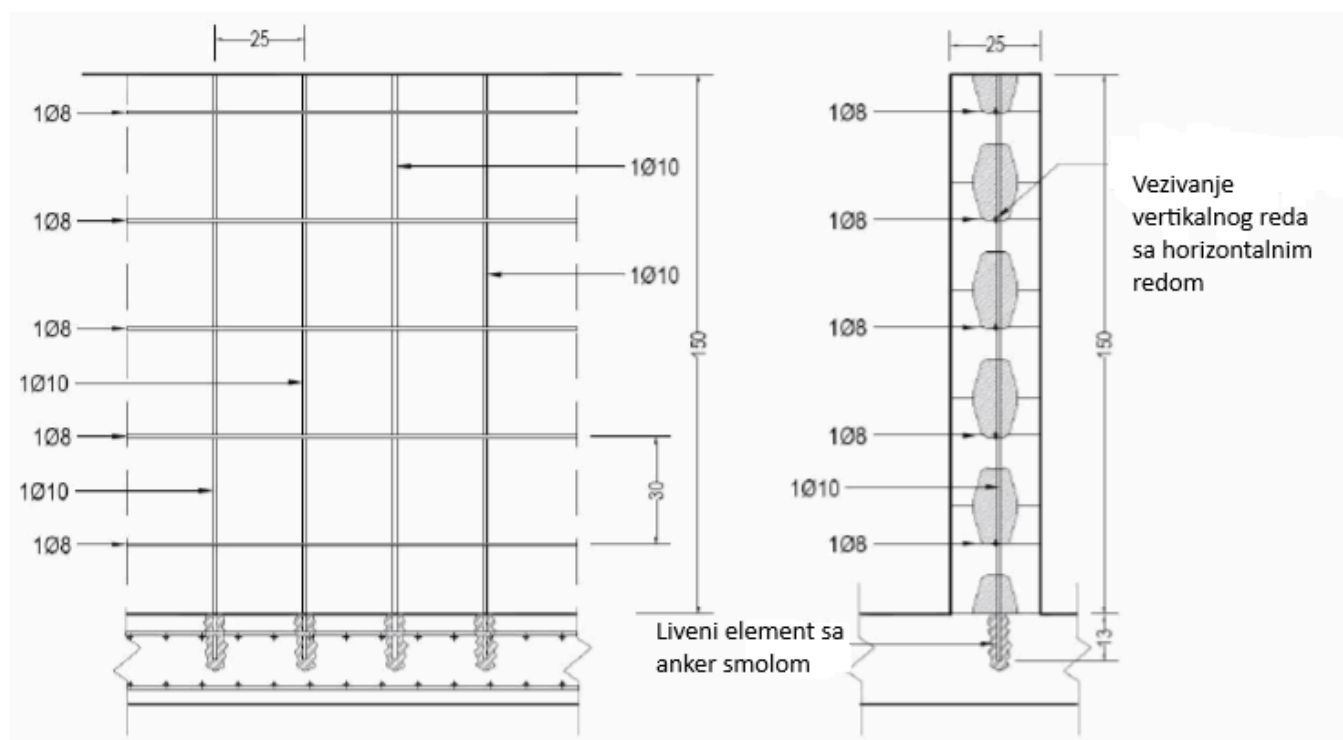



Detalj armature za nadzemni bazen

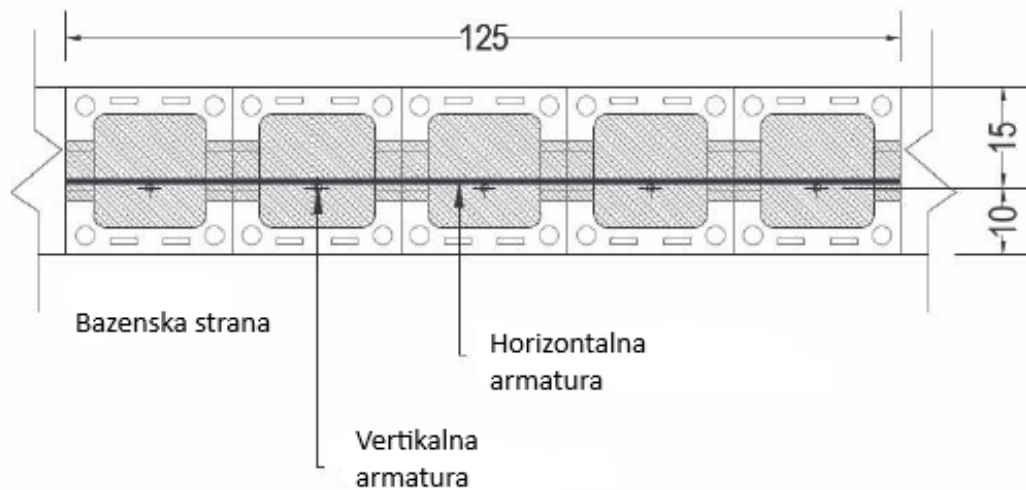

Detalj armature za ukopani bazen

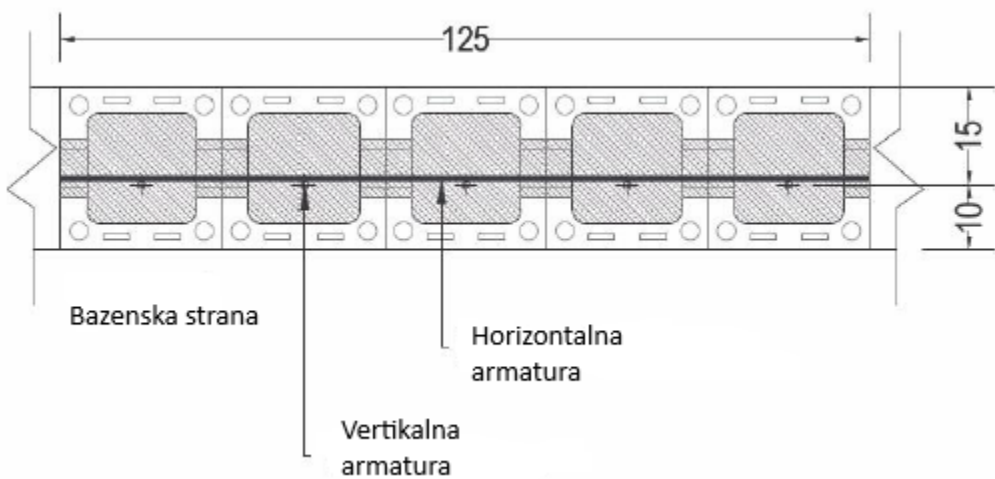

Detalj preklapanja horizontalne armature savijanjem šipki i koriscenjem L elementa

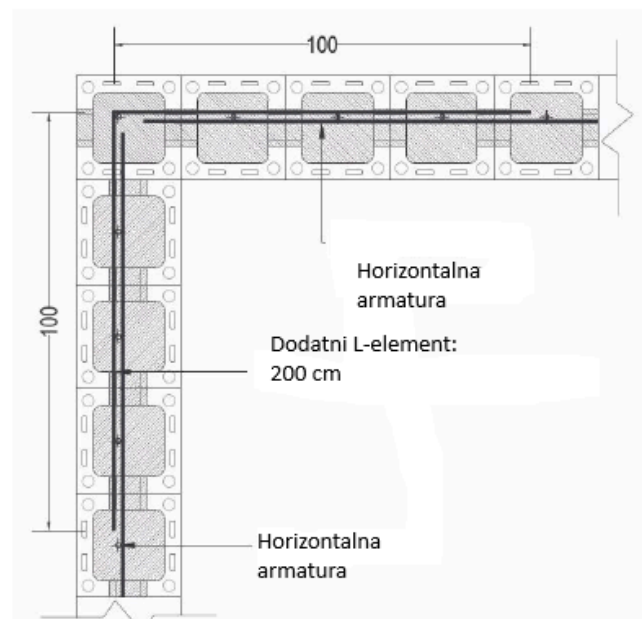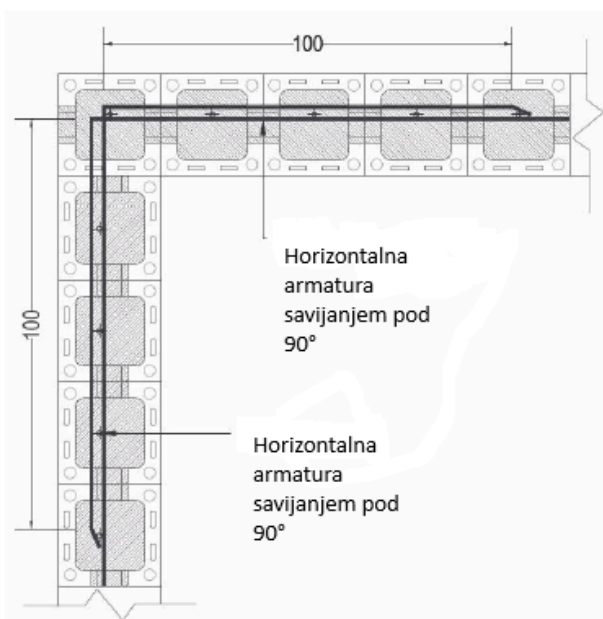




potrebna armatura za zidove po seizmičkim
zonama

Seizmička zona	Visina [m]	Horizontalna armatura (1	Vertikalna armatura
1	1,20	1Ø8	1Ø10
	1,50	1Ø10	1Ø10
	1,80	2Ø10	2Ø12
	2,10	2Ø10	2Ø12
2	1,20	1Ø8	1Ø8
	1,50	1Ø8	1Ø10
	1,80	2Ø10	2Ø10
	2,10	2Ø10	2Ø12
3	1,20	1Ø8	1Ø8
	1,50	1Ø8	1Ø10
	1,80	2Ø8	2Ø10
	2,10	2Ø10	2Ø12
4	1,20	1Ø8	1Ø8
	1,50	1Ø8	1Ø10
	1,80	2Ø8	2Ø10
	2,10	2Ø10	2Ø12

Zona 1 = najveći seizmički rizik

Zona 4 = najmanji rizik

Osnovni plan

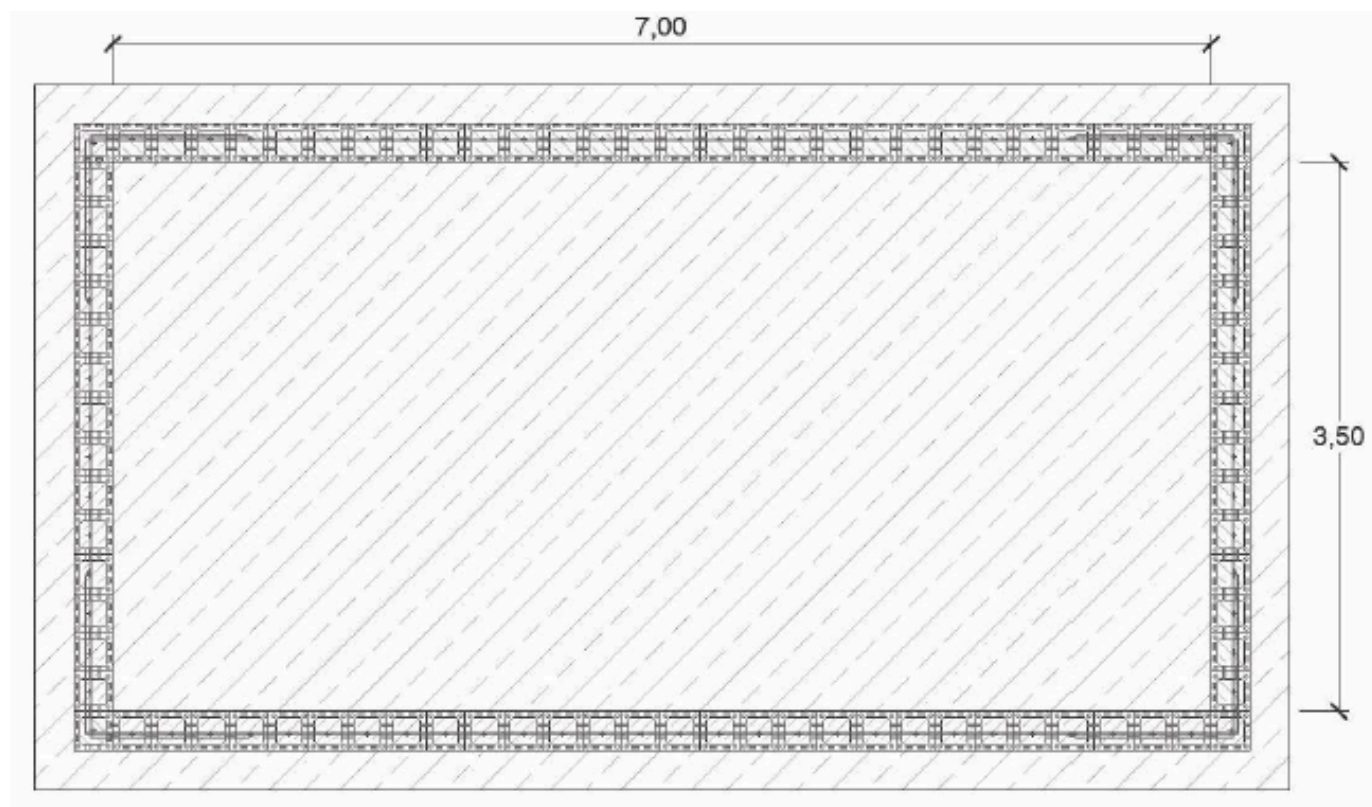

Podupiranje pre betoniranja



Ispravno zalivanje betonom


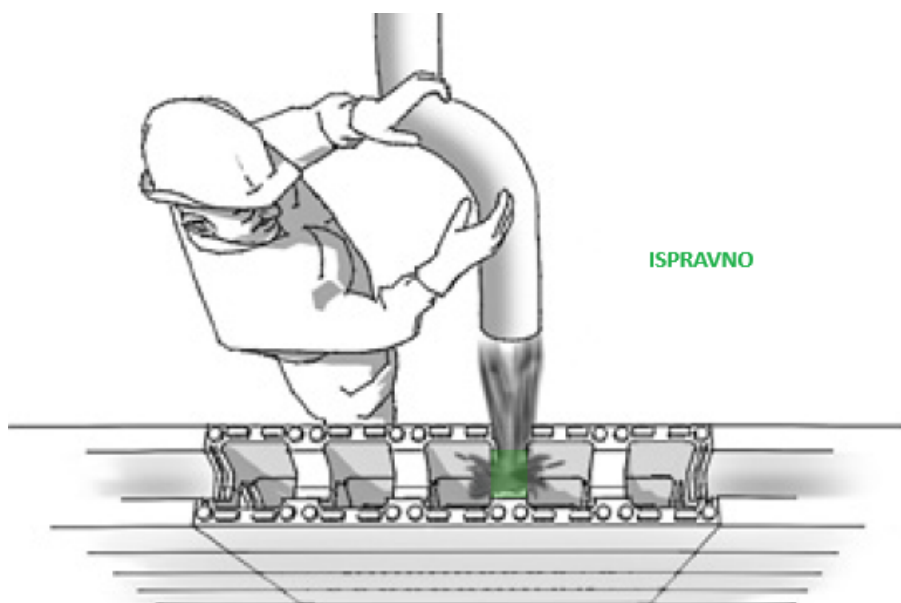


Tabela: Potreban broj blokova po bazenu

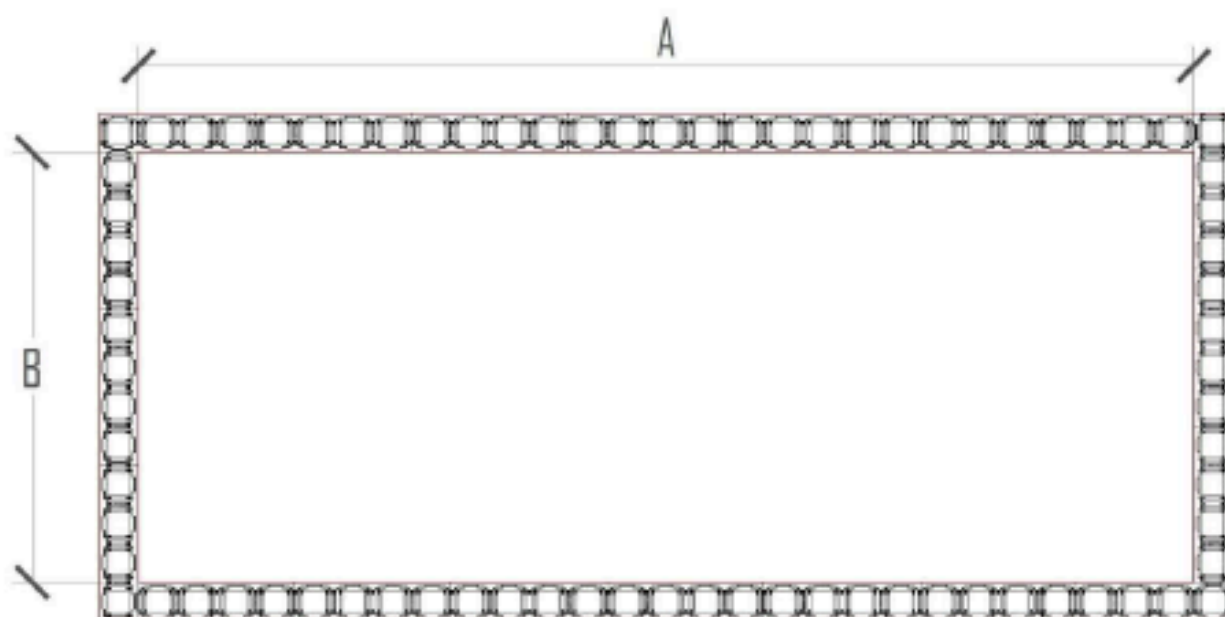

Dimenzija			NERO Blok		čepova	
A	B	H	šifra 100000	paleta	100001 / 100002	kutije za čep
[m]	[m]	[m]	kom	kom	kom	kom
5,75	2,75	1,20	72	2	16	1
5,75	2,75	1,50	90	3	20	1
6,75	2,75	1,20	80	3	16	1
6,75	2,75	1,50	100	3	20	1
7,75	3,75	1,20	96	3	16	1
7,75	3,75	1,50	120	4	20	1
8,75	3,75	1,20	104	3	16	1
8,75	3,75	1,50	130	4	20	1
9,75	4,75	1,20	120	4	16	1
9,75	4,75	1,50	150	4	20	1
10,75	4,75	1,20	128	4	16	1
10,75	4,75	1,50	160	5	20	1
11,75	5,75	1,20	144	4	16	1
11,75	5,75	1,50	180	5	20	1
6,00	3,00	1,20	76	2	16	1
6,00	3,00	1,50	95	3	20	1
8,00	4,00	1,20	100	3	16	1
8,00	4,00	1,50	125	4	20	1
10,00	5,00	1,20	124	4	16	1
10,00	5,00	1,50	155	4	20	1
25,00	12,50	1,20	304	8	16	1
25,00	12,50	1,50	380	10	20	1
50,00	25,00	1,20	604	16	16	1
50,00	25,00	1,50	755	20	20	1